

# EC-UU010-5-PE-BK-3


U/UTP 10, PE -40C, 305

✓ - 100 /c

✓

5  
100 /c.

EC-UU010-5-PE-BK-3 10 5  
305

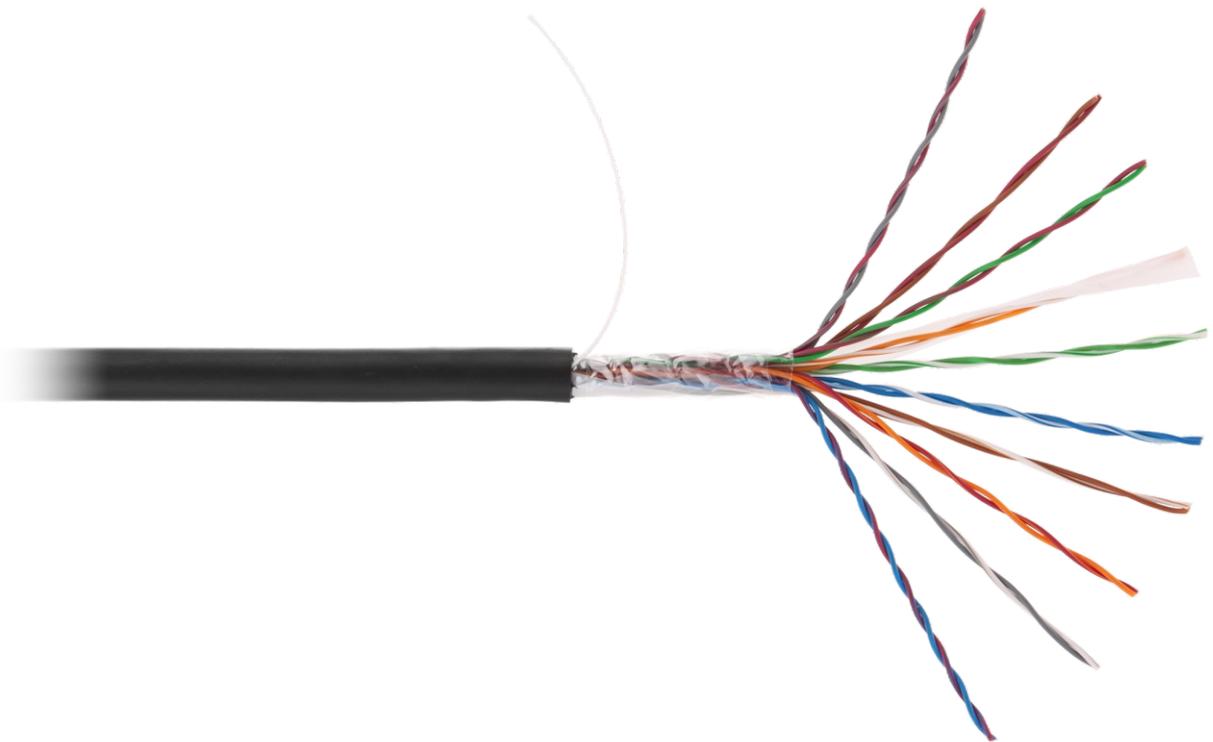

NETLAN EC-UU010-5-PE-BK-3 U/UTP SOLID ETHERNET LAN CABLE 10P CATEGORY 5 PE OUTDOOR -40C

	EC-UU010-5-PE-BK-3
	5
	100
	U/UTP
	0,47 ± 0,01
	(HDPE)
	0,2 ± 0,02
	0,85 ± 0,03
	(PE)
	0,8 ± 0,01
	7,6 ± 0,2
	56,5 ± 0,5
	8-
	6-
	200
	100 ± 15
	115
	305
	: ISO/IEC 11801, EN 50173 TIA/EIA-568
	10BASE-T, 100BASE-TX, 100BASE-T4, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive
	-40 +60. -10 +50. -40 +60
	-
	1

EC-UU010-5-PE-BK-3	5	10	U/UTP	, PE		305	0,038400	19,200